


V-BREW UNI TANK

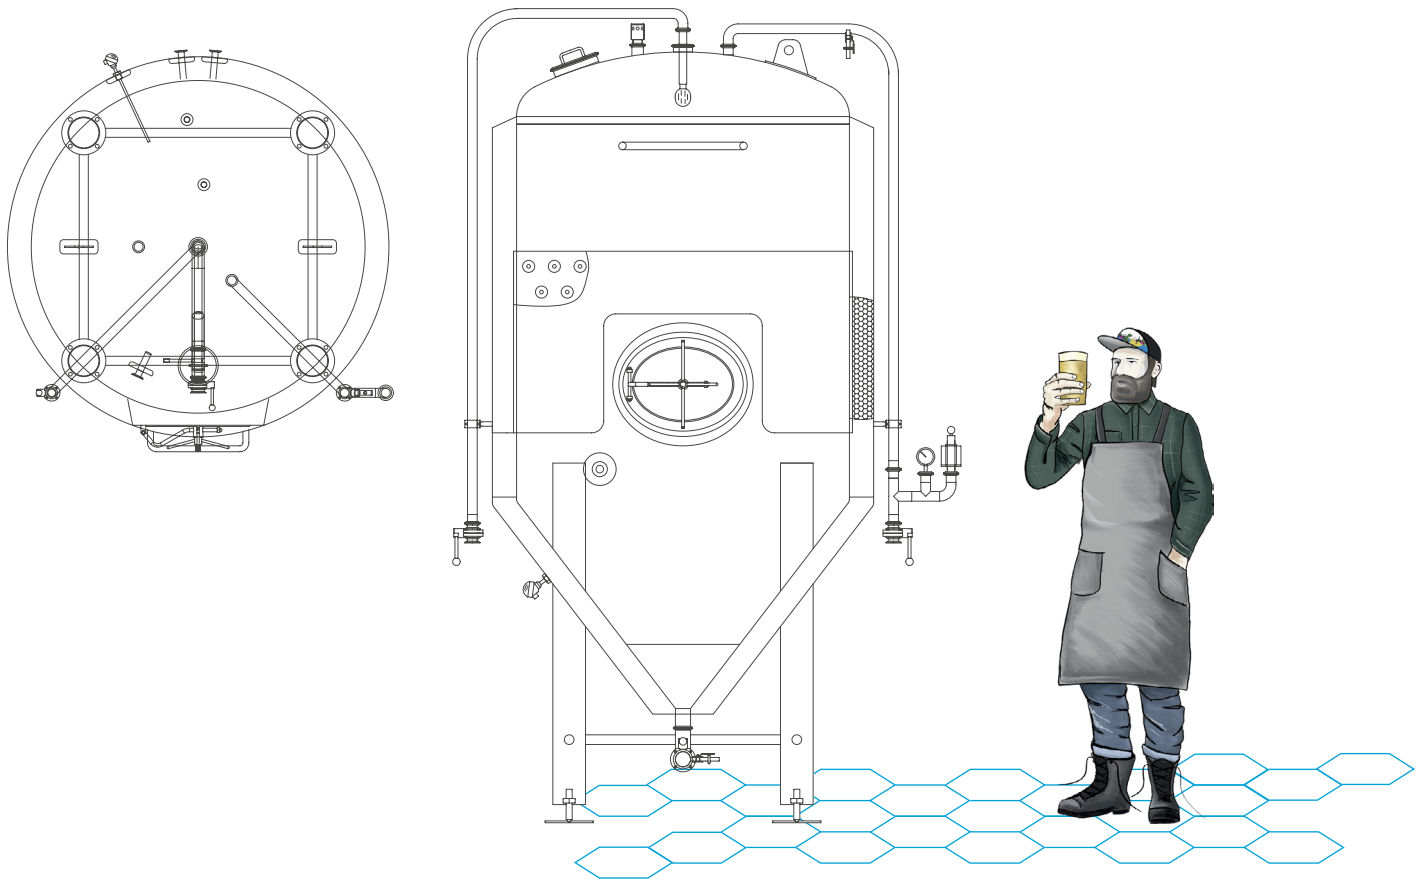

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

CAPACITY

300 L
500 L
1000 L
1500 L
2000 L
3000 L
4000 L
5000 L
10,000 L
20,000 L

PRICE

£2,400
£3,600
£4,250
£4,900
£5,800
£7,300
£8,300
£9,400
£14,000
£25,000

Indicative price only
Does not include shipping

SPECIFICATION

Inner-Jacket (SUS304), TH=3.0mm
External-Jacket (SUS304), TH=2.0mm
Dish head (SUS304), TH=3.0mm
Insulation: PU-thickness: 80mm
Glycol jacket: dimpled plate placed on cone and side
60 degree cone on bottom
CIP arm with cleaning ball
Blow off arm with spunding valve and pressure gauge
Two-way pressure relief valve placed on the top of tank
External-Jacket (SUS304), TH=2.0mm
Side manway: 280*380mm
Dry hops port on the top of tanks with cap, diameter is 6" (152mm)
Sampling port with full sanitary sample valve
Rotating racking arm and port on cone with butterfly valve
Drain arm diameter is 2" with butterfly valve
With Ladder hook and Lifting lug
Design pressure 0.3Mpa; Working pressure (without PED Certificate) 0.049Mpa
PED Certification available upon request